

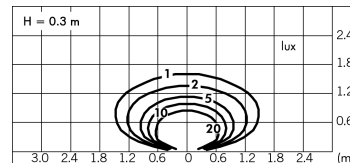
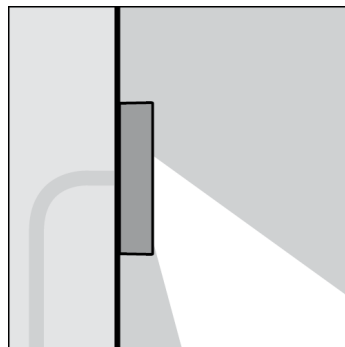
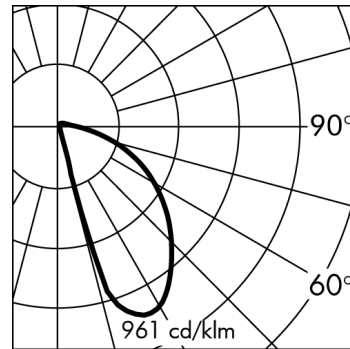


MINISKILL SQUARE



S.6250W.24 (Anthracite grey)
 module LED 3000K 24Vdc DIMMABLE PWM
 Step light surface mounted

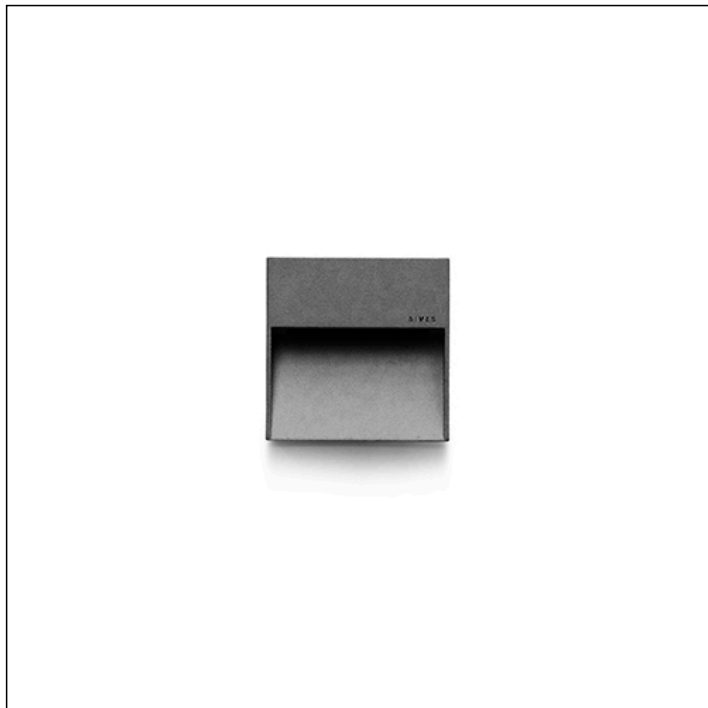

Light Source Technical Data

Light source type:	LED
Colour temperature:	3000K
Rated module luminous flux:	565lm
Rated luminaire luminous flux:	185lm
Rated module power:	3.6W
Rated luminaire power:	3.7W
Luminaire efficacy:	50lm/W
ULR:	3.5%
CIE Flux Code:	41 77 95 97 100
Color Rendering Index:	CRI 90
Standard Deviation Color Matching:	MacAdam step 3

Power Supply Technical Data


Voltage (DC):	24Vdc
See the SIMES power supply accessories list on the following pages	
Dimmable:	PWM

Technical Installation Data

Electrical insulation class:	III
Protection class IP:	IP65
Mechanical resistance:	IK08
Weight:	0.636Kg
Power cable:	1m - H05RN-F

Temperature and life time Technical Data

LED Lifetime:	L80 B10 70.000h Ta 25°C
	L80 B10 50.000h Ta 40°C
Lifespan of the LUMINAIRE:	min. 70.000h Ta 25°C
	min. 50.000h Ta 40°C
Performance ambient temperature:	Tq 25°C
Operating ambient temperature range:	da -20°C a +50°C
Storage temperature range:	da -20°C a +60°C

MINISKILL SQUARE**S.6250W.24 (Anthracite grey)****SPECS SHEET****LUMINAIRE TYPE**

Wall mounted luminaire. IP rating IP 65

MATERIAL CHARACTERISTICS

Aluminium die cast housing in EN AB-47100 (low copper content) with high resistance against corrosion. Stone wash surface treatment prior to painting process. A4 grade Stainless Steel screws with 2,5-3% molybdenum content which increases the resistance against corrosion. Silicone gaskets. Painting Process : 3 Step Process

1) Surface treatment with BONDERITE. A heavy metal free chemical surface treatment containing ceramic nano particles giving a cohesive, inorganic and highly dense protective coating. 2) PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content. 3) POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions. Resistance test protection for Marine applications for 1200h. Mechanical resistance IK 08

LIGHTING PERFORMANCE

Toughened glass diffuser. LOR --

WIRING

MINISKILL is supplied with a pre-wired 1m H05RN-F cable. Isolation: CLASS III . Available colours: White (cod.01), Aluminium grey (cod.14), Anthracite grey (cod.24). Weight: 0.636 Kg Glow Wire test: --

LED module included**SKILL REGISTERED DESIGN**


This luminaire contains built-in LED modules. In case of damage or malfunction please contact the manufacturer to receive additional instructions on how to replace and relative spare parts to order. The LED modules cannot be handled in the luminaire by the end user.

This product contains a light source of energy efficiency class (EPREL - European Product Registry for Energy Labelling): D.

LED modules are engineered accordingly to the existing regulations of Lumen Maintenance (LM80) and Technical Memorandum (TM21), where uniformity and quality of the light is 70,000 hours referred to L80 B10 Ta 25 ° C (50,000 hours referable to L80 B10 Ta 40°C). Lifespan of the luminaire min. 70.000 hours Ta 25°C, min. 50,000 hours at 40°C. Performance Ambient temperature Tq 25°C. Operating ambient temperature range is from -20°C to +50°C. Storage temperature range from -20°C to +60°C.

MINISKILL SQUARE

S.6250W.24 (Anthracite grey)



ACCESSORIES

**S.3660****JUNCTION BOX IP65***

Junction box with cable glands for 3 cables IN (possibility of 3 more cables IN with S.3670 accessories) Maximum load capacity 500Kg Dimensions 300mmx300mmx230mm

**S.3670****1 ADDITIONAL CABLE GLAND**

Required for the connection of over 2 luminaires to the junction box S.3660 / power supply S.3664, S.3665, S.3667, S.3668.

**S.2400****POWER SUPPLY NOT DIMMABLE 35W 230Vac/24Vdc IP20**

In: 240V Alternate Current
Out: 24V Direct Current.

The Total power of all connected luminaires may not be higher than the power of the driver. CLASS II SELV Dimensions: 195 x 43 x 30,2 mm WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

**S.2401****POWER SUPPLY NOT DIMMABLE 60W 230Vac/24Vdc IP20**

In: 240V Alternate Current
Out: 24V Direct Current.

The Total power of all connected luminaires may not be higher than the power of the driver. CLASS II SELV Dimensions: 225 x 43 x 29,8 mm WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

**S.2402****POWER SUPPLY NOT DIMMABLE IN BOX 60W 230Vac/24Vdc IP55**

Dimensions: 260 x 240 x 100 mm.

Cable IN: 2 with cable glands PG11

Cable OUT: 5 with cable glands PG11

IP55 CLASS II SELV The Total power of all connected luminaires may not be higher than the power of the driver.

WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

**S.2403****POWER SUPPLY NOT DIMMABLE 100W 230Vac/24Vdc IP20**

In: 240V Alternate Current

Out: 24V Direct Current.

The Total power of all connected luminaires may not be higher than the power of the driver. CLASS II SELV Dimensions: 295 x 43 x 29,8 mm

WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

**S.2404****POWER SUPPLY NOT DIMMABLE IN BOX 90W 230Vac/24Vdc IP55**

Dimensions: 260 x 240 x 100 mm.

Cable IN: 2 with cable glands PG11

Cable OUT: 5 with cable glands PG11

IP55 CLASS II SELV The Total power of all connected luminaires may not be higher than the power of the driver.

WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

**S.2405****POWER SUPPLY NOT DIMMABLE 60W 230Vac/24Vdc IP67**

In: 240V Alternate Current

Out: 24V Direct Current.

The Total power of all connected luminaires may not be higher than the power of the driver. CLASS II SELV Dimensions: 150 x 53 x 21 mm

WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.


**S.2406****POWER SUPPLY NOT DIMMABLE 90W 230Vac/24Vdc IP67**

In: 240V Alternate Current

Out: 24V Direct Current.

The Total power of all connected luminaires may not be higher than the power of the driver. CLASS II SELV Dimensions: 171 x 63 x 37,5 mm

WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.


**S.2407****POWER SUPPLY NOT DIMMABLE 14,4W 230Vac/24Vdc IP67**

In: 240V Alternate Current

Out: 24V Direct Current.

The Total power of all connected luminaires may not be higher than the power of the driver. IP67 CLASS II SELV Dimensions: 79 x 38 x 25 mm.

WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

**S.2411****POWER SUPPLY 0/1-10V 230V/700mA 17W o 230V/24V 15W IP68**

230V/700mA Maximum power consumption: 17W or 230V/24V

Frequency PWM : 240Hz Maximum power consumption: 15W

Dimensions 121mmx53mmx26mm IP68 SELV CLASS II Warning!!!

Always check the minimum Forward voltage (Vf min) of the fixtures that will be connected to this driver.

WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

**S.2415****POWER SUPPLY DIMMABLE 230Vac/24Vdc 24W 244Hz IP67**

Dimmable DALI for monochromatic LED 24W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP67 CLASS II SELV PWM Frequency : 244Hz Dimensions

185 x 35x 33mm

WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

**S.2416****POWER SUPPLY DIMMABLE 230Vac/24Vdc 75W 244Hz IP67**

Dimmable DALI 2 for monochromatic LED 75W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP67 CLASS II SELV PWM Frequency : 244Hz Dimensions

280 x 40x 28mm

WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

**S.2419****POWER SUPPLY DIMMABLE DALI2, PUSH DIM 36W 230Vac/24Vdc 3,6KHz IP20**


Dimmable DALI2, PUSH DIM for monochromatic LED 35W

240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP20 CLASS II SELV Dimensions 210mmx43mmx30mm PWM Frequency :

Next ...

MINISKILL SQUARE

S.6250W.24 (Anthracite grey)



ACCESSORIES



S.2420
POWER SUPPLY DIMMABLE DALI, PUSH DIM e DSI 35W
230Vac/24Vdc 1KHz IP20
 Dimmable DALI, PUSH DIM, DSI for monochromatic LED 35W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP20 CLASS II SELV Dimensions 195mmx43mmx30,2mm PWM Frequency : ~1KHz NB: not suitable for Family products NANOLED STAINLESS-STEEL
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2421
POWER SUPPLY DIMMABLE DALI, PUSH DIM e DSI 60W
230Vac/24Vdc 1KHz IP20
 Dimmable DALI, PUSH DIM, DSI for monochromatic LED 60W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP20 CLASS II SELV PWM Frequency : ~1KHz Dimensions 225 x 43x 29,8mm NB: not suitable for Family products NANOLED STAINLESS-STEEL
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2422
POWER SUPPLY DIMMABLE DALI, PUSH DIM, DSI 100W
230Vac/24Vdc >1KHz IP20
 Dimmable DALI, PUSH DIM, DSI for monochromatic LED 100W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP20 CLASS II SELV PWM Frequency : >1KHz Dimensions 295 x 43x 29,8mm NB: not suitable for Family products NANOLED STAINLESS-STEEL
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2423
BOX WITH DIMMABLE POWER SUPPLY DALI2, 1-10v e PUSH-DIM
60W 230Vac/24Vdc 2kHz IP55
 60W 230Vac/24Vdc Dimensions 260mmx240mmx100mm PWM Frequency : 2kHz IP55 SELV CLASS II NB: not suitable for Family products NANOLED STAINLESS-STEEL
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2424
POWER SUPPLY DIMMABLE 1-10V, PUSH DIM 60W 230Vac/24Vdc
244Hz IP20
 Dimmable 1-10V, PUSH DIM for monochromatic LED 60W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP20 CLASS II SELV PWM Frequency : 244Hz Dimensions 125 x 82x 29mm
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2425
BOX WITH DIMMABLE POWER SUPPLY DALI, 1-10v e PUSH-DIM
90W 230Vac/24Vdc 2kHz IP55
 90W 230Vac/24Vdc Dimensions 260mmx240mmx100mm PWM Frequency : 2kHz IP55 SELV CLASS II NB: not suitable for Family products NANOLED STAINLESS-STEEL
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2426
POWER SUPPLY DIMMABLE DALI 2 120W 230Vac/24Vdc 2,5KHz
IP67
 Dimmable DALI 2 for monochromatic LED 120W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP67 CLASS II SELV PWM Frequency : 2,5KHz Dimensions 191 x 63x 37,5mm NB: not suitable for Family products NANOLED STAINLESS-STEEL
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2427
POWER SUPPLY DIMMABLE 1-10V 60W 230Vac/24Vdc 1,47KHz
IP67
 Dimmable 1-10V for monochromatic LED 60W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP67 CLASS II SELV PWM Frequency : 1,47KHz Dimensions 150x53x35mm NB: not suitable for Family products NANOLED STAINLESS-STEEL
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.




S.2428
POWER SUPPLY DIMMABLE 1-10V 90W 230Vac/24Vdc 1,47KHz
IP67
 Dimmable 1-10V for monochromatic LED 90W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP67 CLASS II SELV PWM Frequency : 1,47KHz Dimensions 171 x 63x 37,5mm NB: not suitable for Family products NANOLED STAINLESS-STEEL
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2429
POWER SUPPLY DIMMABLE DALI2, PUSH DIM 75W 230Vac/24Vdc
3,6KHz IP20
 Dimmable DALI2, PUSH DIM for monochromatic LED 75W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP20 CLASS II SELV Dimensions 293mmx43mmx30mm PWM Frequency :



S.2430
POWER SUPPLY NOT DIMMABLE MULTI-POWER
230V/250mA-700mA 20W oppure 24Vdc 16W IP20
 MULTI-POWER SUPPLY 230V/250mA-700mA Maximum power consumption 20W or 16W 230Vac/24Vdc Dimensions 110mmx50mmx20mm IP20 CLASS II SELV Warning!!! Always check the minimum Forward voltage (Vf min) of the fixtures that will be connected to this driver.
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.




S.2433
POWER SUPPLY NOT DIMMABLE 36W 230Vac/24Vdc IP67
 In: 240V Alternate Current
 Out: 24V Direct Current.
 The Total power of all connected luminaires may not be higher than the power of the driver. IP67 CLASS II SELV Dimensions: 120 x 38 x 25 mm.
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

Next ...

MINISKILL SQUARE

S.6250W.24 (Anthracite grey)



ACCESSORIES



S.2435
POWER SUPPLY NOT DIMMABLE IN BOX IP67
230V/250mA-700mA 20W o 230Vac/24Vdc 16W IP67
 MULTI-POWER SUPPLY 230V/250mA-700mA Maximum power consumption 20W or 16W 230Vac/24Vdc Dimensions 175,5mmx86,5mmx43mm IP67 CLASS II SELV Warning!!! Always check the minimum Forward voltage (Vf min) of the fixtures that will be connected to this driver.
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.




S.2438
POWER SUPPLY 230V/250mA-700mA 20W o 230Vac/24Vdc 16W 240Hz DALI DIMMABLE IN BOX IP67
 DALI DIMMABLE MULTI-POWER SUPPLY 230V/250mA-700mA Maximum power consumption: 20W or 16W 230Vac/24Vdc Dimensions 175,5mmx86,5mmx43mm PWM Frequency : 240Hz IP67 CLASS II SELV NB: not suitable for Family products NANOLED STAINLESS STEEL Warning!!! Always check the minimum Forward voltage (Vf min) of the fixtures that will be connected to this driver.
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2439
POWER SUPPLY 230V/250mA-700mA 20W o 230Vac/24Vdc 16W 240Hz DIMMABLE 1-10V, PUSH DIM IN BOX IP67
 1-10V, PUSH DIM DIMMABLE MULTI-POWER SUPPLY 230V/250mA-900mA Maximum power consumption: 20W or 16W 230Vac/24Vdc Dimensions 175,5mmx86,5mmx43mm PWM Frequency : 240Hz IP67 CLASS II SELV NB: not suitable for Family products NANOLED STAINLESS STEEL Warning!!! Always check the minimum Forward voltage (Vf min) of the fixtures that will be connected to this driver.
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2441
POWER SUPPLY DIMMABLE DALI, PUSH DIM, 0-10V, 1-10V 230Vac/24Vdc 24W 244Hz IP20
 Dimmable DALI, PUSH DIM, 0-10V, 1-10V for monochromatic LED 24W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. PWM Frequency : 244Hz Dimensions 164mm x38mm x24,5mm IP20 CLASS II SELV WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2442
POWER SUPPLY DIMMABLE DALI2, PUSH DIM, 0-10V, 1-10V 230Vac/24Vdc 75W 244Hz IP20
 Dimmable DALI2, PUSH DIM, 0-10V, 1-10V for monochromatic LED 75W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP20 CLASS II SELV PWM Frequency : 244Hz Dimensions 280mmx40mmx29mm WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2445
POWER SUPPLY NOT DIMMABLE 120W 230Vac/24Vdc IP67
 In: 240V Alternate Current
 Out: 24V Direct Current.
 The Total power of all connected luminaires may not be higher than the power of the driver. CLASS II SELV Dimensions: 191 x 63 x 37,5 mm WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2446
POWER SUPPLY NOT DIMMABLE 320W 230Vac/24Vdc IP67
 In: 240V Alternate Current
 Out: 24V Direct Current.
 The Total power of all connected luminaires may not be higher than the power of the driver. CLASS I SELV Dimensions: 252 x 90 x 43 mm WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2498) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.2449
POWER SUPPLY DIMMABLE DALI2, PUSH DIM 100W 230Vac/24Vdc 3,6KHz IP20
 Dimmable DALI2, PUSH DIM for monochromatic LED 100W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP20 CLASS II SELV Dimensions 293mmx43mmx30mm PWM Frequency :



S.3400
POWER SUPPLY NOT DIMMABLE 10W 230Vac/24Vdc IP20
 In: 240V Alternate Current
 Out: 24V Direct Current.
 The Total power of all connected luminaires may not be higher than the power of the driver. Dimensions: 120 x 35 x 20 mm.
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.3401
POWER SUPPLY NOT DIMMABLE IN BOX 10W 230Vac/24Vdc IP55
 (Electronic power supply included)
 Dimensions: 230 x 210 x 80 mm.
 Cable IN: 2 with cable glands PG11
 Cable OUT: 6 with cable glands PG11
 IP55 CLASS II The Total power of all connected luminaires may not be higher than the power of the driver.
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.3425
POWER SUPPLY NOT DIMMABLE 230Vac/24Vdc 8W IP54
 It can be housed directly in the recessed box of MINISKILL round, square and vertical flush versions. (To be wired into the recessed box ensuring adequate IP protection). Dimensions : 51mm x 31mm x h 21mm
 WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.



S.3664
JUNCTION BOX WITH NOT DIMMABLE POWER SUPPLY 35W 240V/24Vdc
 IP65 power supply for: N°4 Micropool LED* o N°1 Minipool LED o N°1 Pool LED maximum load capacity 500Kg Dimensions 200mmx200mmx220mm * = require 2 x S.3670 additional cable gland WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

Next ...

MINISKILL SQUARE**S.6250W.24 (Anthracite grey)****ACCESSORIES****S.3665****JUNCTION BOX WITH NOT DIMMABLE POWER SUPPLY 90W
240V/24Vdc**

IP65 power supply for: N°5 Micropool LED** o N°4 Minipool LED* o
N°2 Pool LED maximum load capacity 500Kg Dimensions
300mmx300mmx230mm ** = require 3 x S.3670 additional cable gland
* = require 2 x S.3670 additional cable gland

WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE
(S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO
MORE THAN 10m AWAY.

**S.6256****RECESSED BOX + FIXING KIT**

Suitable for fair faced concrete applications. Extractor tools included.
Dim. 121mmx121mmx72mm